


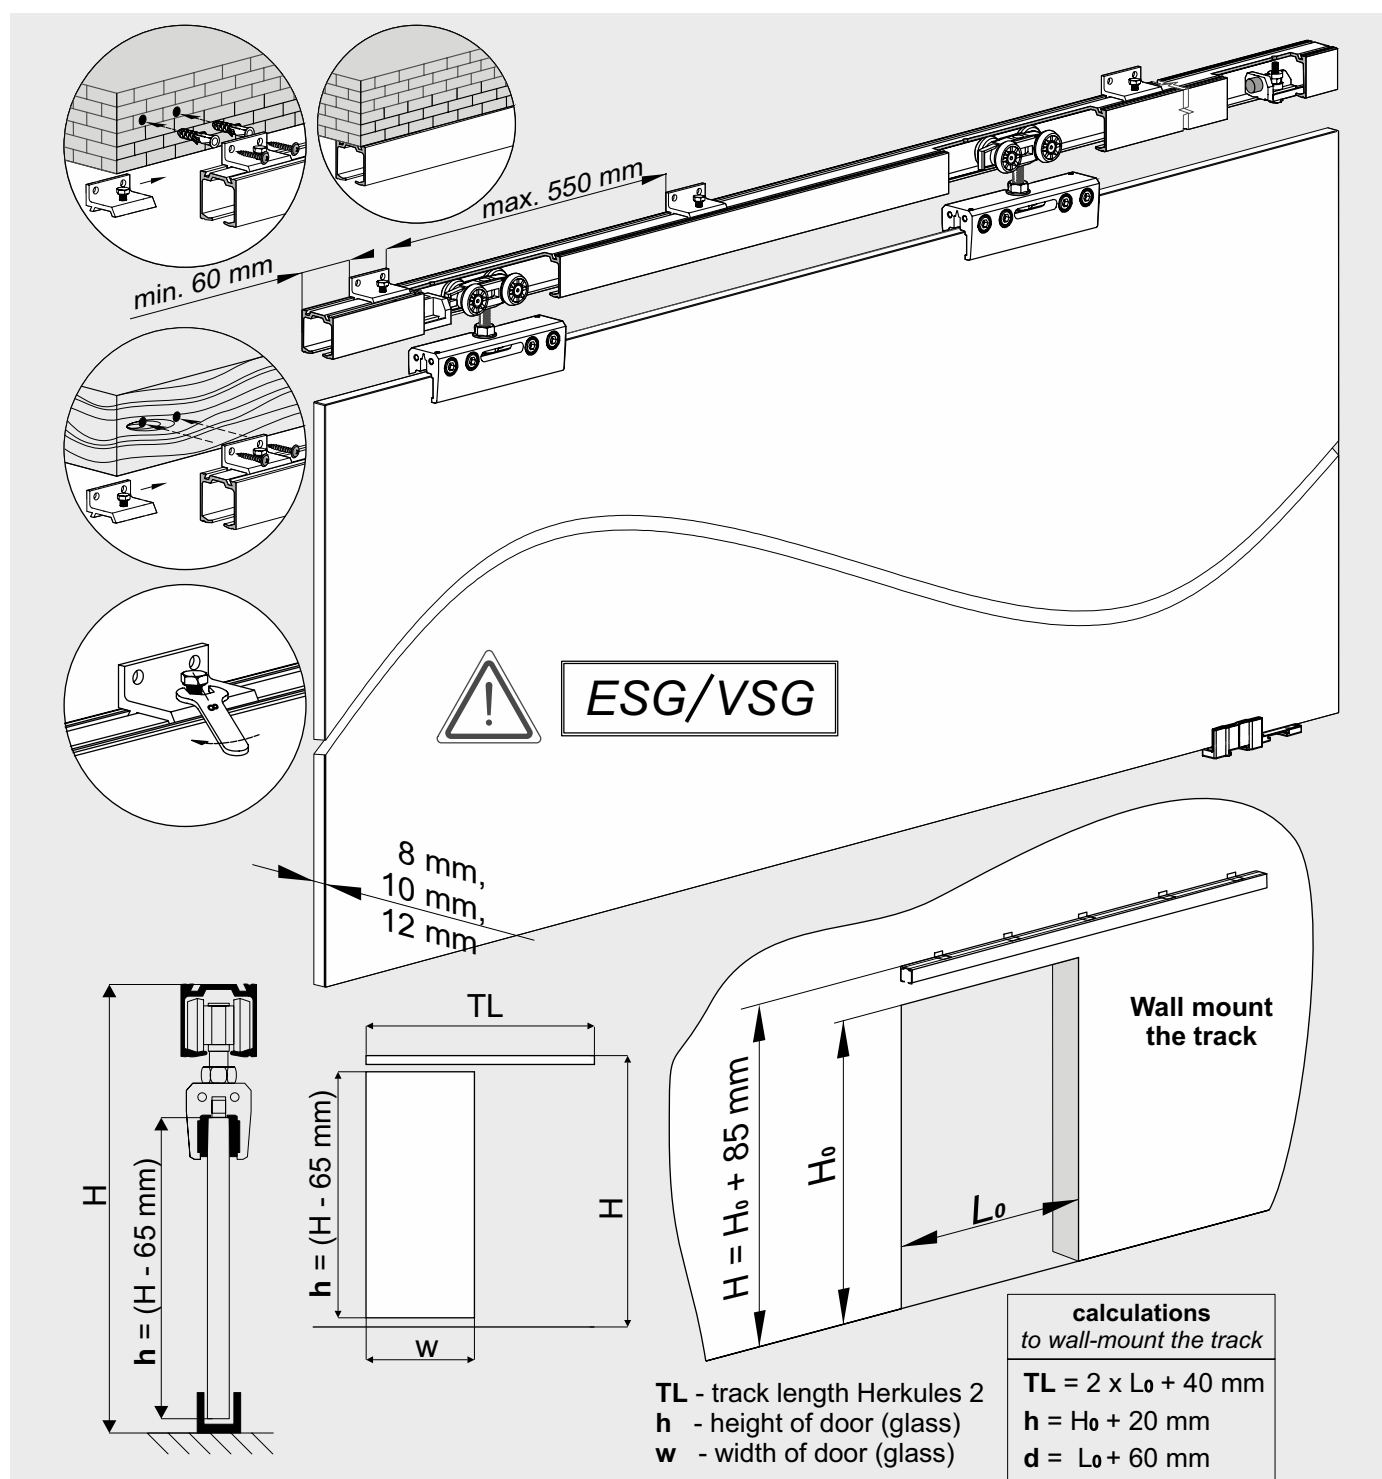


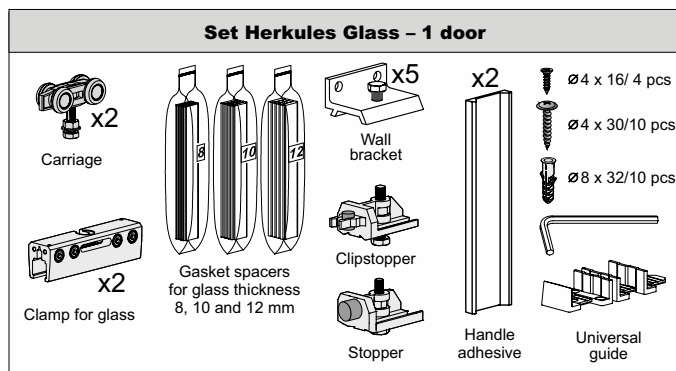


## COMPONENTS





## OPTIONS



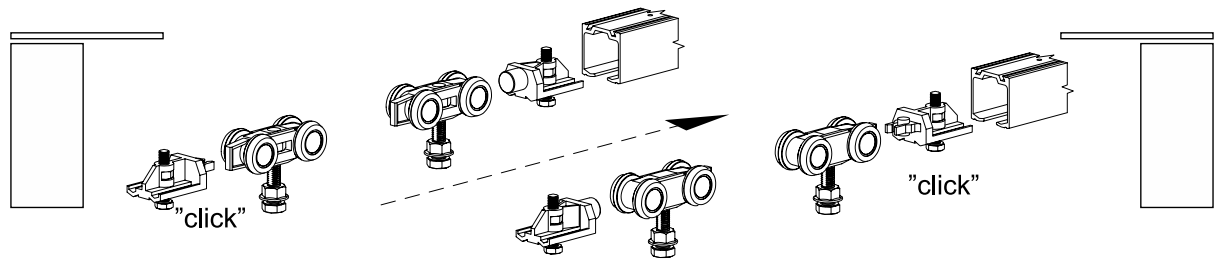


### Mounting gasket spacers in clamp

Depending on the thickness of glass (8, 10 or 12 mm)  
use gaskets 8, 10 or 12 mm.

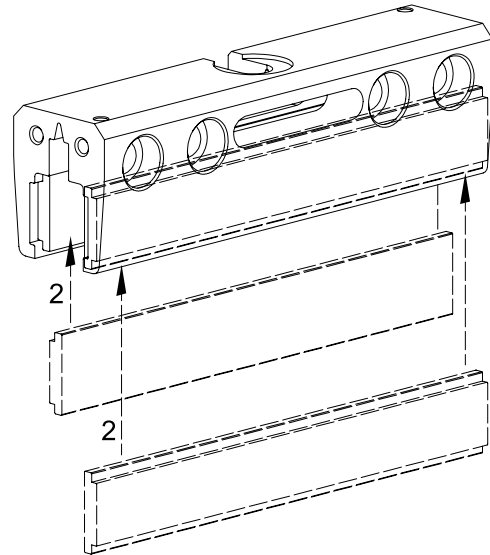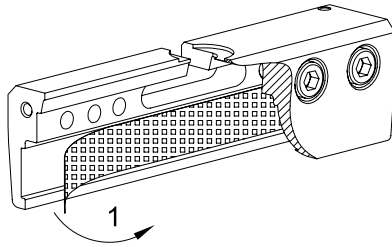


### Installation of clamps on the glass

Prior to catch installation, grease must be removed  
from glass surface

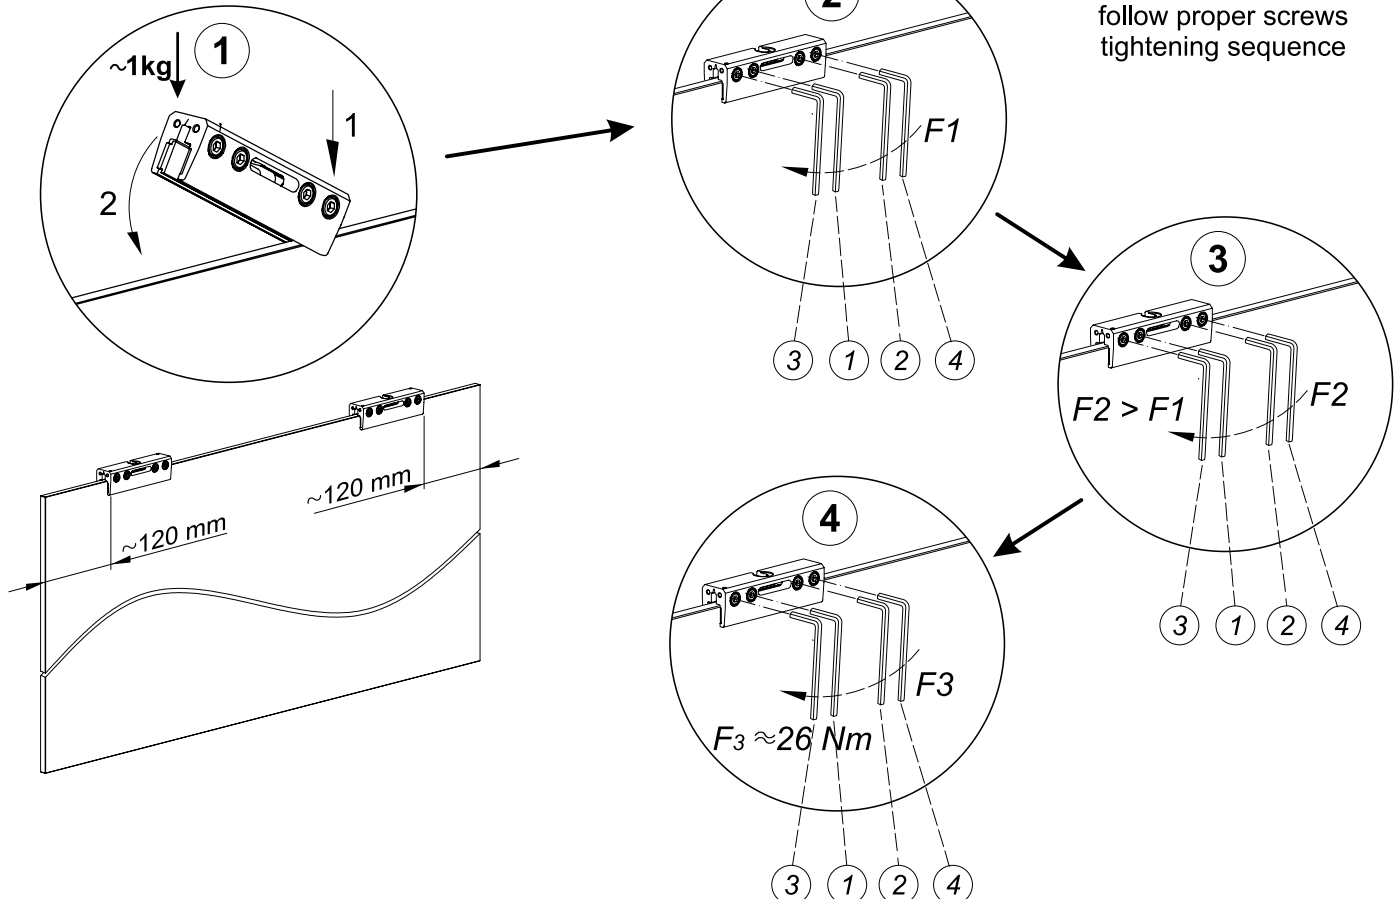





## Door installation

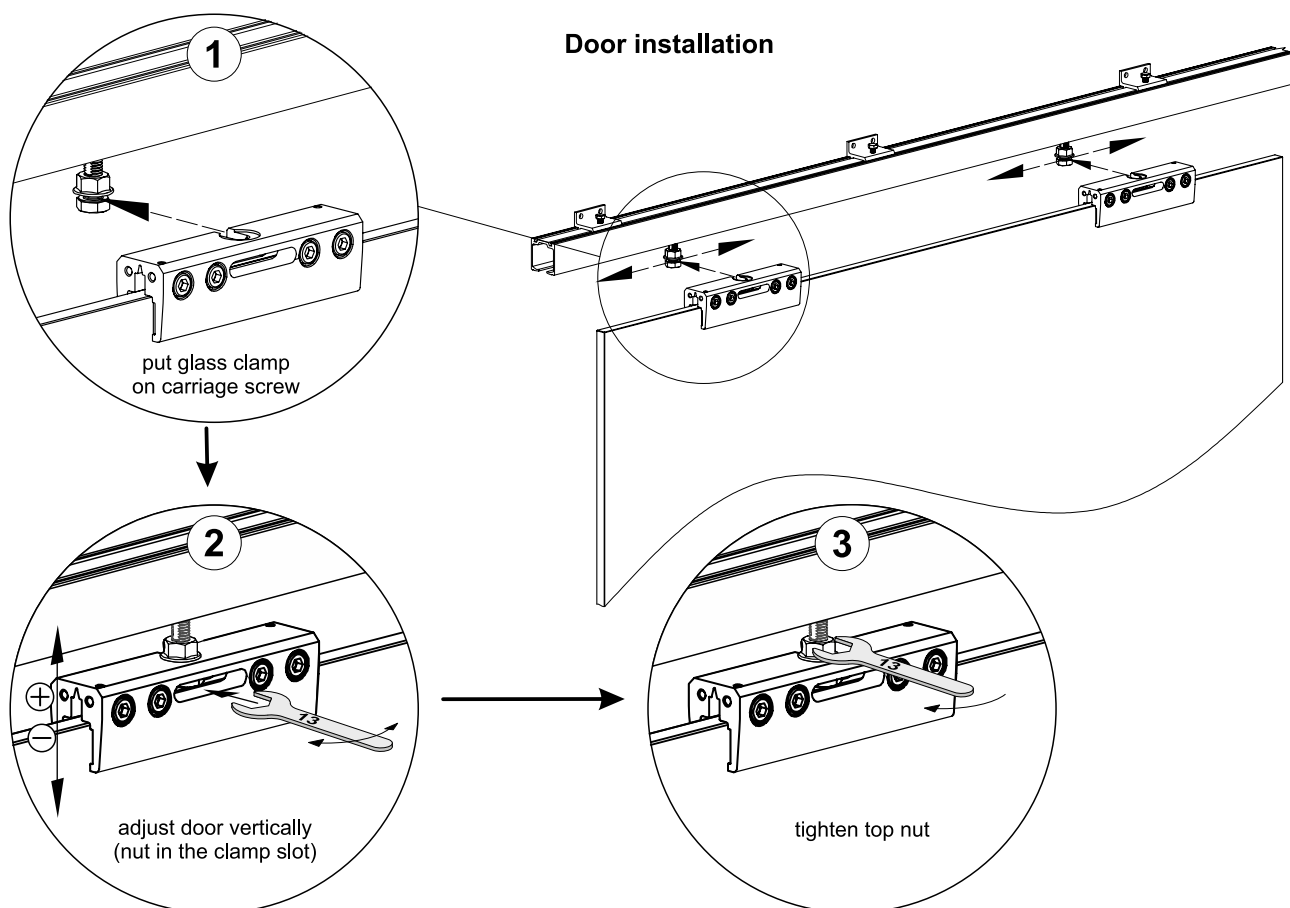


## Horizontal door adjustment

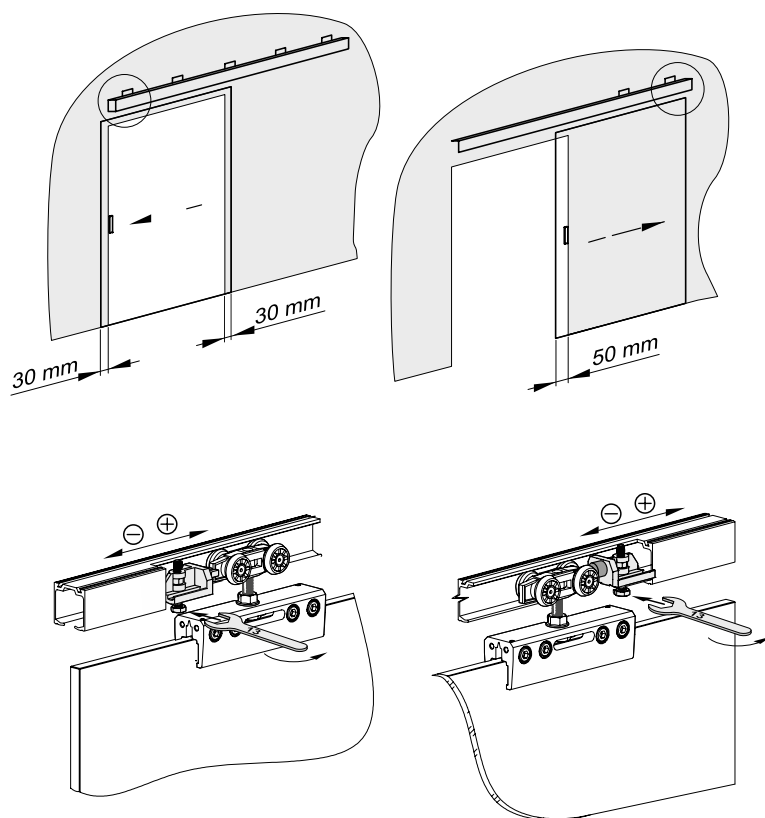

## Guide installation

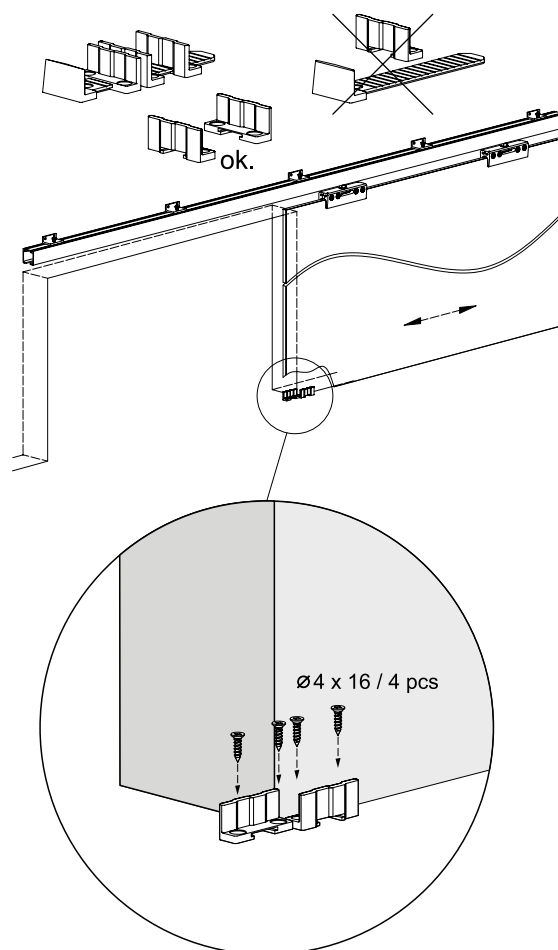

## Installation of masking fascia on track Herkules 2

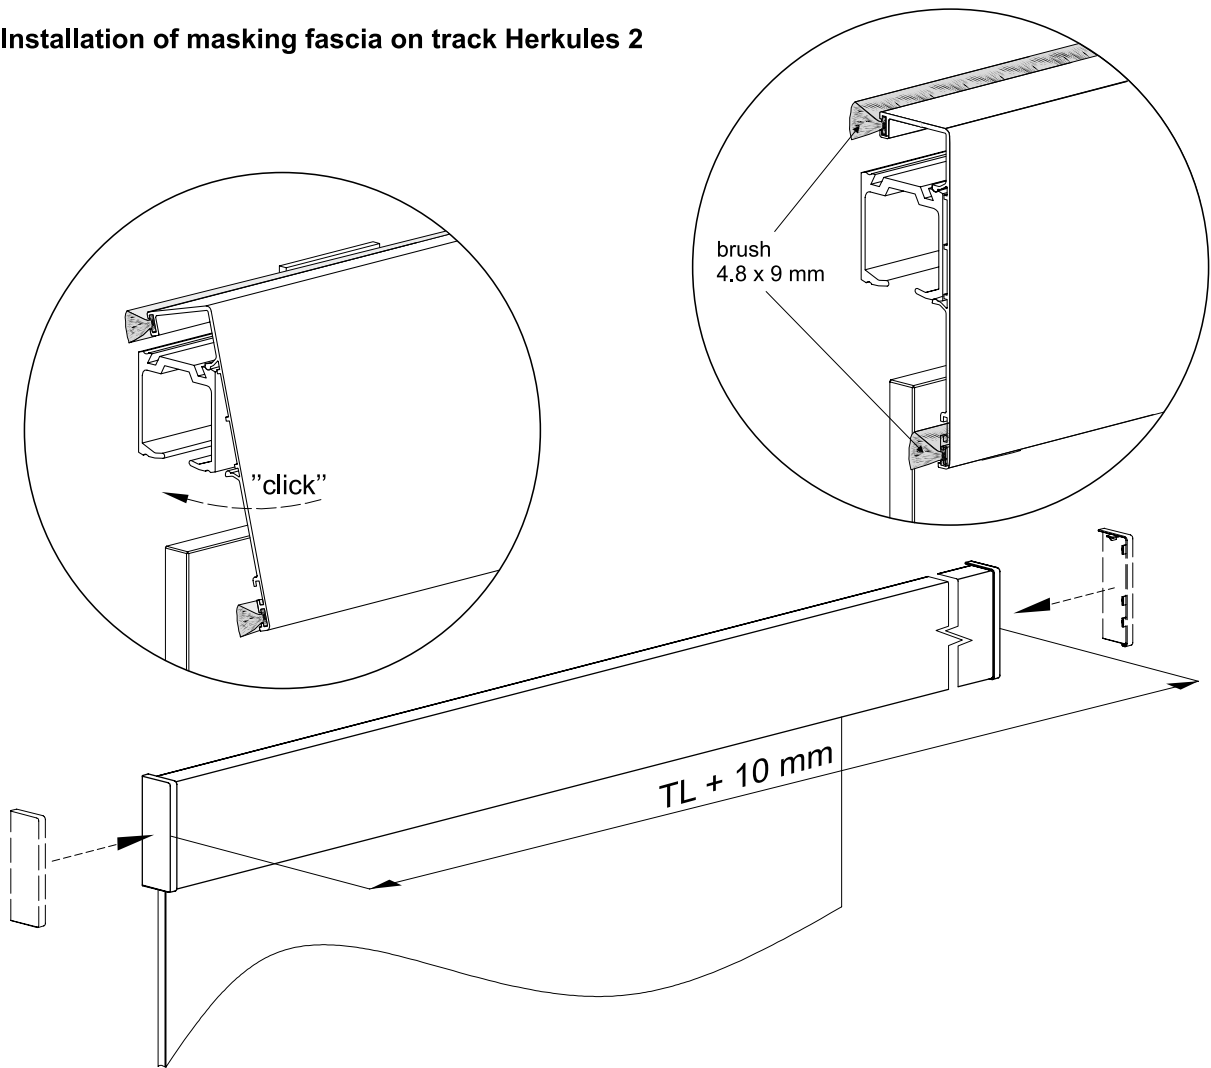

## Glass clamp dismantling

