


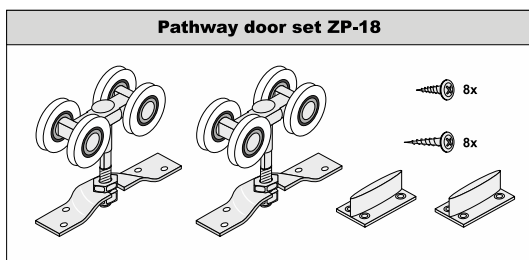



COMPONENTS




1. Track within the opening

Board height - hb:


$hb = H - 70 \text{ mm}$
 H - height of the opening

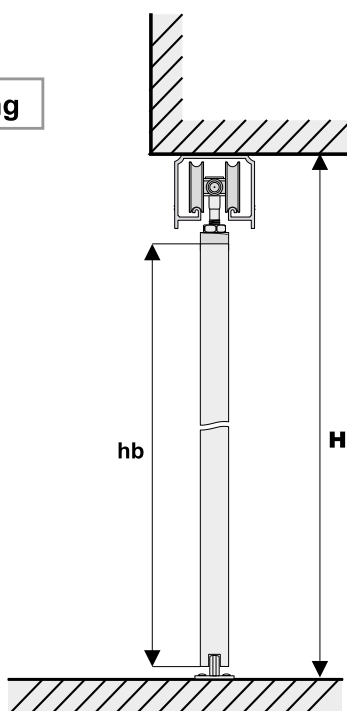

Side fastening of URSUS track
- max. weight of 100 kg per door

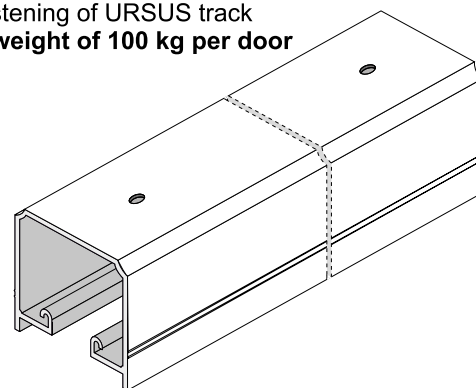


2. Track outside the opening

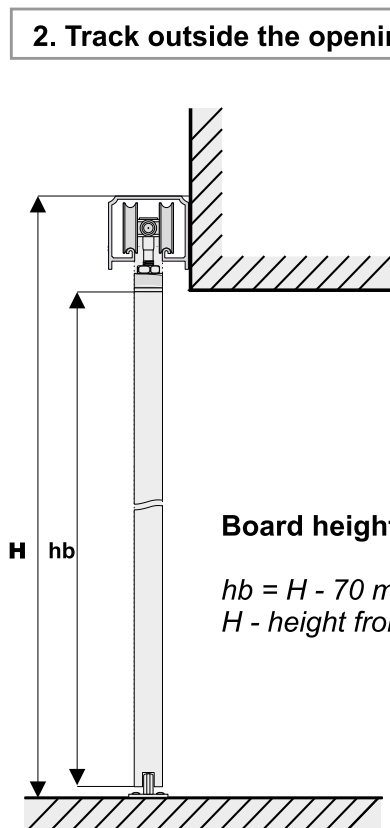


Board height hb:

$hb = H - 70 \text{ mm}$
 H - height from floor base to top of track

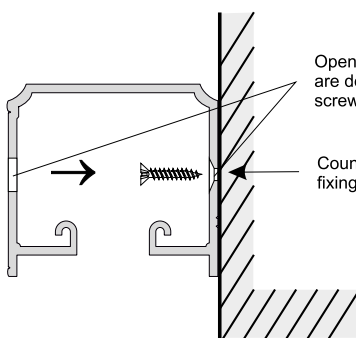

Opening diameters
are dependent on
screws or bolts use.

Countersink
fixing holes

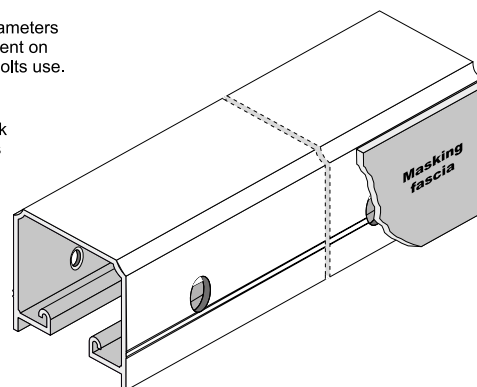

Side fastening of URSUS track - max. weight of 50 kg per door

ATTENTION!

In cases that it will not be possible to insert
carriages after the installation of the top track,
carriages should be inserted prior
to track installation.